

The Servomex 2700 analyser continuously measures the levels of Oxygen and/or Combustibles (COe) in flue gases to allow improved combustion efficiency and early warning of combustibles (COe) breakthrough

If you have a requirement for Continuous Emissions Monitoring Systems (CEMS) please contact Servomex and we will be pleased to provide you with information on our range of analysers and sample conditioning systems.



**Typical applications:**

- Power Generation Boilers**
- Process Heaters**
- Thermal Crackers**
- Incinerators**

Please contact Servomex for further information on applications in Metals and Cement production industries.

Specification	Gases Measured:		
	Oxygen (O <sub>2</sub> )	Combustibles (COe- Carbon Monoxide Equivalent)	
		Gas and Light Oil <sup>1</sup>	Gas, Oil and Coal <sup>1</sup>
<b>PERFORMANCE</b> Display Range: Output Range:  Accuracy: Response Time (T <sub>90</sub> )  *whichever is greater	0.01% to 25.00% 0-1% min. to 0-25% max O <sub>2</sub> in 1% steps  ±1% of reading or ±0.1% O <sub>2</sub> * 10 seconds. sensor head only	0ppm to 10,000ppm 0-500ppm(v) min. to 0-2,000ppm(v)  ±25ppm(v) or ±5% of reading 20 seconds sensor head only	0ppm to 10,000ppm 0-500ppm(v) min. to 0-6,000ppm(v) with an over range to 0-15,000ppm(v) ±75ppm(v) or ±5% of reading 20 seconds sensor head only
<b>SIGNAL INPUTS/OUTPUTS</b> Analogue Output: Alarms & Relays:  Digital Inputs <b>PHYSICAL</b> Dimensions (typical) Control Unit:(W x D x H) Sensor Head: Weight:  Hazardous Area Classification: Ingress Protection: Mounting:	One configurable isolated 0/4-20mA per measurement (1kΩ. max). Four SPCO relays (250VAC/3A or 28VDC/1A max), configurable for Concentration Alarms, Faults, In Calibration, In Blowback, and solenoid valves for blowback and autocalibration. Two non-isolated digital inputs provided to initiate autocalibration and perform blowback  391 x 167 x 260mm (15.4" x 6.6" x 10.3") 301 x 330 x 256mm (11.9" x 13.0" x 10.1") Control Unit : <11kg (<24.3lbs) Sensor Head: <17kg (<37.5lbs) - Dual transducer  Europe: ATEX Group II, Category 3 Gases & Dusts. US & Canada: Class I & II, Div 2 & Class III, Div 1 & 2 (Control Unit only) General Purpose (Sensor Head) Contact Servomex for 'Z' purge option (USA) IP66 / NEMA 4X  Control Unit: Wall, 19" rack and panel mounting Sensor Head: Choice of mounting flanges and adaptors. Full range of sample probes available.		

<sup>1</sup> Consult Servomex for high sulphur and other applications



## Ambient Conditions

Temperature

Operating

Sensor Head: -20°C to +70°C (-4°F to +158°F)

Control Unit: -10°C to +55°C (+14°F to +131°F)

Storage:

Sensor Head: -30°C to +80°C (-22°F to +176°F)

Control Unit: -20°C to +55°C (-4°F to +131°F)

Altitude: Up to 2000m

## Power Supply

100 - 120 Vac, 50/60 Hz

220 - 240 Vac, 50/60 Hz

Control Unit: 250VA

Sensor Head: 600VA

Note: Control Unit & Sensor Head are powered separately. Control unit power supply is fixed at time of order, but is field configurable. The sensor head supply is factory set.

## Sensor Head Compressed Air Requirements

Aspirator Air:

Pressure: 3.5psig typical (3 to 5 psig - 0.2 to 0.3barg)

Flow: <1.5 litres/min typical


Auxiliary Air:

Flow: 100 ml/min ±1%

Variations in auxiliary air flow outside the tolerances stated above can affect the COe readings. All Servomex Utilities Units have been fully optimised to provide the stable auxiliary air flow required.

## Sample Wetted Materials

Item	Materials
Sensor Head	stainless steel (303 and 316), gasket sealing material (Klinger grade SLS 150)
Oxygen Sensor	stainless steel (310 and 316), zirconia, platinum, alumina, Ni/Fe/Cr alloy, high temperature sealing glasses.
Combustibles Sensor	stainless steel (316), platinum, platinum/iridium, zirconia, alumina, corrosion resistant glass
Unfiltered sample probe (<700°C)	stainless steel (316)
Filtered sample probe (<700°C)	stainless steel (316), stainless steel (310), silicon carbide
Unfiltered sample probe (700°C - 1000°C)	Haynes alloy 556, stainless steel (316)
Filtered sample probe (700°C - 1000°C)	stainless steel (310), Haynes alloy 556, stainless steel (316), silicon carbide
High Temperature sample probe (<1750°C)	high temperature ceramic, stainless steel (316)

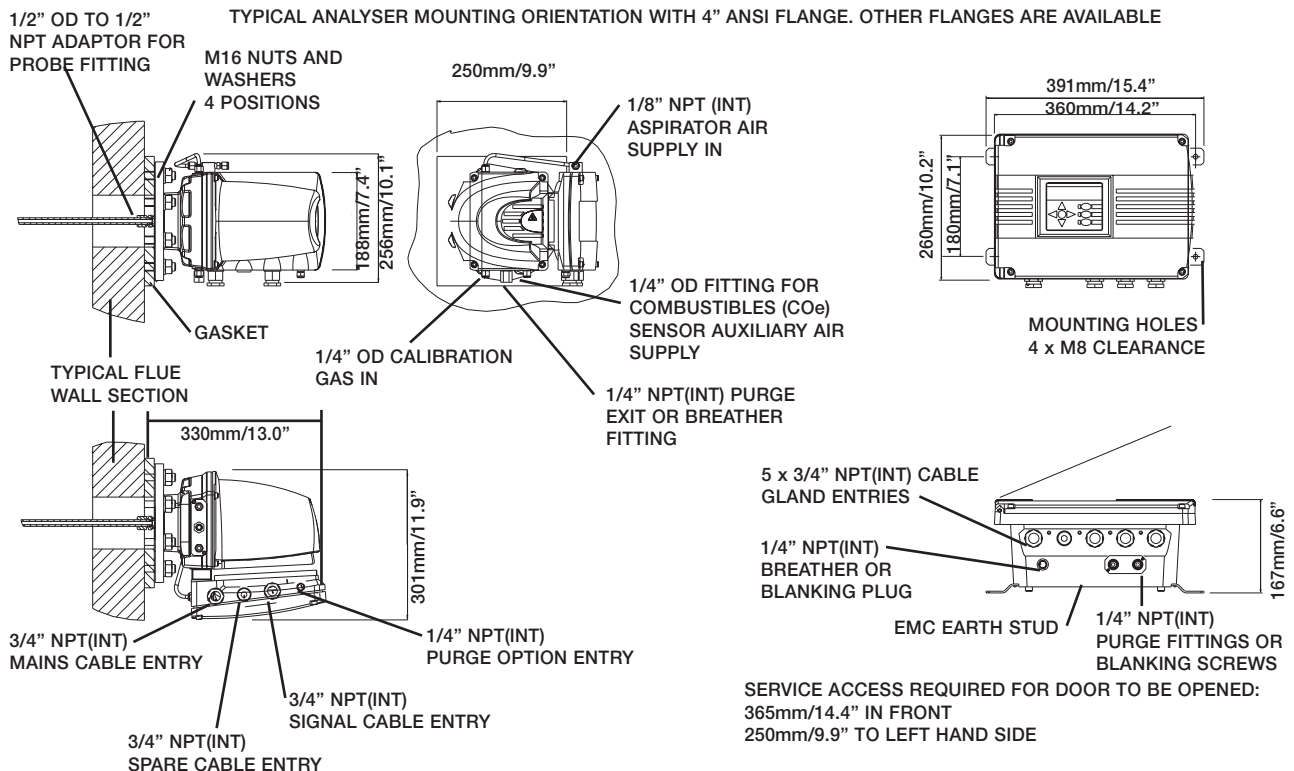

## Hazardous Location Approvals

### Control Unit:

Approved as EEx nC IIC T5 (-20°C < Ta < +55°C)  
for ATEX Group II, Category 3 Gas and Dust  
Hazardous Atmospheres T75°C  
(BASEEFA No. BAS02ATEX3205)

### Approved as non-incendive for:

Class I, Div. 2, Groups A,B,C & D,  
Class II, Div. 2, Groups F & G,  
Class III, Div. 1 & 2  
Enclosure Type 4X  
T5. Ambient Temperature 55°C max.  
(Factory Mutual - FMRC)

### Suitable for use in:

Class I, Div. 2, Groups A,B,C & D,  
Class II, Div. 2, Groups E, F & G,  
Class III, Div. 1 & 2  
T5. Ambient Temperature 55°C max.  
Enclosure Type 4X  
(Canadian Standards Association - CSA)

### Sensor Head:

Not approved for installation in hazardous locations.

## EC Directive Compliance

The 2700 analyser complies with ATEX Directive 94/9/EC, the Low Voltage Directive 73/23/EEC and the EMC Directive 89/336/EEC (as amended by Directive 92/31/EEC), all as amended by Directive 93/68/ECC.

It conforms to the following harmonised European standards for electrical safety and electromagnetic compatibility:

EN 61010-1: Safety requirements for electrical equipment for measurement, control and laboratory use.

EN 61326-1: Electrical equipment for measurement, control and laboratory use - EMC requirements

This product is rated for Installation Category II in accordance with IEC 664.

This product is rated for Pollution Degree 2 in accordance with IEC 664.

## Safety USA/Canada

Complies with FM approval class number 3810  
CAN/CSA - C22.2 No. 1010.1-92

Cross Sensitivity Specification	
Effect of other common combustible flue gases per 1000 ppm(v)	COe reading ppm(v)
SO <sub>2</sub>	< 60
CH <sub>4</sub>	< 5
Other combustibles, eg. H <sub>2</sub> , C <sub>2</sub> H <sub>6</sub> , C <sub>3</sub> H <sub>8</sub>	Response depends on species, consult Servomex

System Response Times T <sub>90</sub> (Typical)		
Measurement:	O <sub>2</sub> only	Combustibles (COe) only
<700°C, 1m long, stainless steel sample probe with sample filter:	<17s	<27s
<1000°C, 1m long, H556 alloy sample probe with sample filter:	<17s	<27s
<1750°C, 1m long, Ceramic sample probe with sample filter:	<20s	<30s

## Utilities Unit Specification

### Temperature

Operating: -10°C to +50°C ( +14°F to +122°F)  
Storage: -20°C to +55°C ( - 4°F to +131°F)

### Compressed Air & Blowback Air requirements:

Pressure: 1 to 5 barg (15 to 72.5psig)  
Flow: 4.5 to 10 litres/min  
Instrument grade compressed air\*, free of oil, water & dirt

### Calibration Gas requirements:

Pressure: 1 barg (15 psig)  
Flow: 600ml/min typical

### Utilities Unit/s

02730-701 (Oxygen only)

93mmW x 99mmD x 165mmH (3.7" x 3.9" x 6.5")  
<400gms (<1.0lbs)

02730-702 (COe only and Dual), 731 (Oxygen only and manual calibration) and 732 (COe only, Dual and manual calibration)

390mmW x 174mmD x 265mmH (15.5" x 6.8" x 10.4")  
<4.5Kgs (<10lbs)

### Automatic Calibration and Utilities Units \*\*

02730-711, 712, 713, 721, 722 & 723

400mmW x 220mmD x 500mmH (16" x 9" x 20")  
<16Kgs (<35lbs)

Ingress Protection: IP65/NEMA 12 (Auto cal. units only)

Power Supply: 100 - 120 Vac, 50/60Hz <20VA  
(Field Configurable) 220 - 240 Vac, 50/60Hz <20VA

The Nickel plated brass bulkhead connections are suitable for 1/4" NPT and BSP male fittings & tubing. Internal components are brass, plastic fittings and tubing.

\* or Nitrogen, if analyser equipped for Nitrogen aspiration.

\*\* The six autocalibration versions of the utility units comply with the "CE Marking Directive" 93/68/EEC.

## Interconnecting Cable Requirements

	Cross Section	Max.
Oxygen only		
3 twisted pairs with overall screen *	1.0mm <sup>2</sup>	100m
	1.5mm <sup>2</sup>	150m
	2.5mm <sup>2</sup>	300m
Combustibles only		
6 twisted pairs with individual and overall screens *		100m
Oxygen and Combustibles		
9 twisted pairs with individual and overall screens *		100m

\* Maximum loop resistance of 4 Ohms is allowed for the heater connections and use cables with a minimum of 1.0mm<sup>2</sup> cross section.

NOTE Add 1 extra twisted pair to the above cable requirements if the optional sensor head temperature readout is required to be displayed by the control unit.

## Calibration Gas Requirements

Calibration Gas Composition	Oxygen Sensor (Zr)	Combustibles Sensor (Tfx)
Air (20.95%(v) O <sub>2</sub> in Nitrogen)*	Span (High)	Zero
*Air must be free from combustible gases (eg CO, H <sub>2</sub> , Hydrocarbons, etc)		
0.3%(v) O <sub>2</sub> in Nitrogen **	Zero (Low)	N/A
** gas composition can be between 0.25% and 2.5% O <sub>2</sub> in Nitrogen		
500ppm(v) Carbon Monoxide in Air ***	N/A	Span
*** gas composition can be between 500ppm(v) and 1000ppm(v) in Air		

Servomex companies, agents and representatives are located throughout the world. Your nearest contact is:

Visit [www.servomex.com](http://www.servomex.com) for technical data sheets, application and technology information for all Servomex analysers.

Servomex has a policy of constant product improvement and therefore reserves the right to change specifications without notice.



Certificate No. 005166  
BS EN ISO 9001



**Servomex Group Limited**, Jarvis Brook, Crowborough, East Sussex, TN6 3DU, England  
**Servomex B.V.**, Stephensonstraat 20, 2723 RN Zoetermeer, Netherlands  
**Servomex S.A.**, 8 Rue Proudhon, B.P. 50, 93212 St Denis La Plaine Cedex, France  
**Servomex GmbH**, Münsterstraße 5, 59065 Hamm, Germany  
**Servomex Company Inc.**, 90 Kerry Place, Norwood, MA 02062, USA  
**Servomex Company Inc.**, 525 Julie Rivers, Suite 185, Sugar Land, Texas 77478-2847, USA.  
**Servomex Asia Pacific Ltd**, 7F, No.88, Sec. 6, Chung Shan N. Rd., Taipei, Taiwan  
**Servomex Asia Pacific Ltd**, (Spectris Group China Ltd-Shanghai Representative Office)  
B-1, 21/F, Phase 2 Shanghai East Ocean Centre, No.618, East Yan An Road, Shanghai 200001, PR China

Global email: [info@servomex.com](mailto:info@servomex.com)

© Servomex Group Limited. 2002. A Spectris company. All rights reserved.

(44) 1892 652181. Fax: (44) 1892 662253  
(31) 79-346 42 42. Fax: (31) 79-342 08 19  
(33) 1 49 46 22 50. Fax: (33) 1 49 46 22 51  
(49) 23 81 68 82 13. Fax: (49) 23 81 68 81 75  
(1) 781-769-7710. Fax: (1) 781-769-2834  
(1) 281-295-5800. Fax: (1) 281-295-5899  
(886) 2-2833 8848. Fax: (886) 2-2833 8844

(86) 21 5385 5332 Fax: (86) 21 6375 8139

Website: <http://www.servomex.com>

TDS2700 Rev.5 09/02 E